

940nm 3W Fiber Coupled Laser Diode Module

940nm Laser Diode|2-pin Package| 105um 200um 400um Fiber Core| High Power LD

WSLX-940-003-H

Wavespectrum Laser Group

www.wavespectrum-laser.com


PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	+10 ~ +30	°C
Storage Temperature	T_{stg}	-40 ~ +80	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

Features:

- 940nm
- 2-pin or 4-pin package
- Long lifetime

Applications:

- Medical laser treatment
- Pumping
- Others

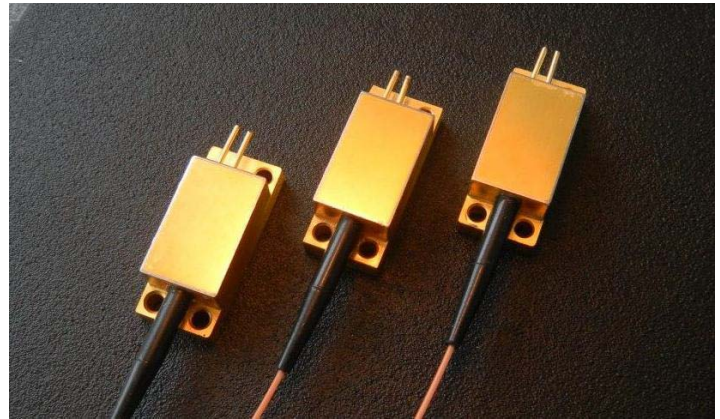


Specifications

WSLX-940-003-H

Center Wavelength@25°C	±3nm	940nm	±10nm
Spectral Width (FWHM)	1nm	----	3nm
Output Power	----	3W	----
Temperature Coefficient of Wavelength	0.3nm / °C		
Threshold Current (Typ.)	0.3A		
Operating Current (Typ.)	3.3A		
Operating Voltage	2.0V		
Slope Efficiency	1.0W/A		
Fiber Core Diameter	105um		
Fiber Numerical Aperture	0.22 (0.15 Optional)		
Fiber Length	100cm		
Connector Type	FC (SMA905 Optional)		
Package Style	2-pin		
Recommend Operating Temperature	25°C		



4-pin Package View

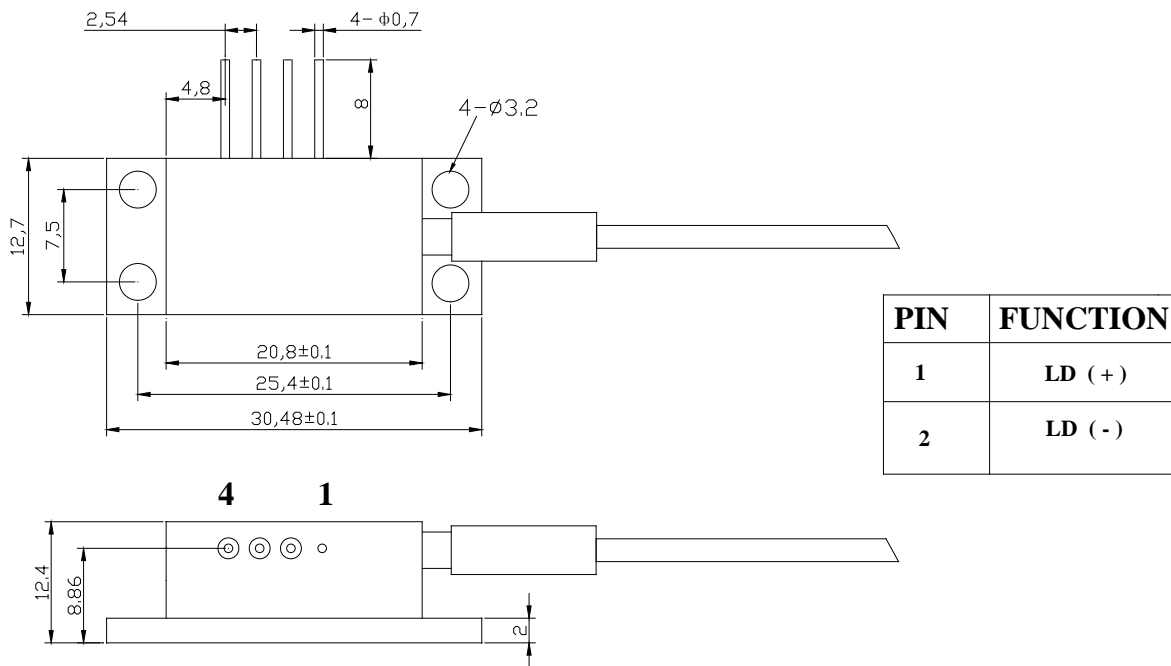

Wavespectrum offer **Customized 940nm Fiber Coupled LD.**

- Customized Output Power
- Customized Fiber Core
- Dual-Wavelength or Tri-Wavelength Module Optional (such as 5w@940nm+350mw@635nm)

Contact us with info@wavespectrum-laser.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

