

525nm~530nm 1.2W 9-Pin HHL Package Fiber Coupled Diode Laser With MM Fiber | High Power Green LD

525nm 1W~1.2W| 9-Pin Package Pigtailed Laser Diode Module |Built-in TEC Cooling | Built-in PD

WSLX-525-1200m-M-H9-T-PD

Wavespectrum Laser Group

www.wavespectrum-laser.com


PARAMETER	SYMBOL	VALUE	UNIT
MAX Reverse Current	I _r	80	mA
Operating Temperature	T _{op}	0~+60	°C
Storage Temperature	T _{stg}	-40~+85	°C
Lead soldering temperature (10 sec.)	T _{ls}	260	°C

Features:	
<ul style="list-style-type: none"> • 525nm • Multi-mode Fiber • Built-in TEC Cooling • Built-in Photodiode • High Stability 	

Specifications	WSLX-525-1200m-M-H9-T-PD		
	Min.	Type	Max.
Center Wavelength@25°C	525nm±10nm		
Spectral Width (FWHM)	---	3nm	---
Output Power	1W	1.2W	----
Recommended Operating Temperature	25 °C		
Threshold Current (Typ.)	----	0.2A	0.6A
Operating Current (Typ.)	----	2.1A	2.3A
Operating Voltage	5.0V		
TEC Max Current	6A		
TEC Max Voltage	9.8V		
Fiber Type	Multi-mode Fiber		
Fiber Core	105um (50um, 200um, 400um Optional)		
Fiber Length	>80cm		
Connector Type	SMA905/FC		
Package	9-Pin		



9-PIN HHL Package View

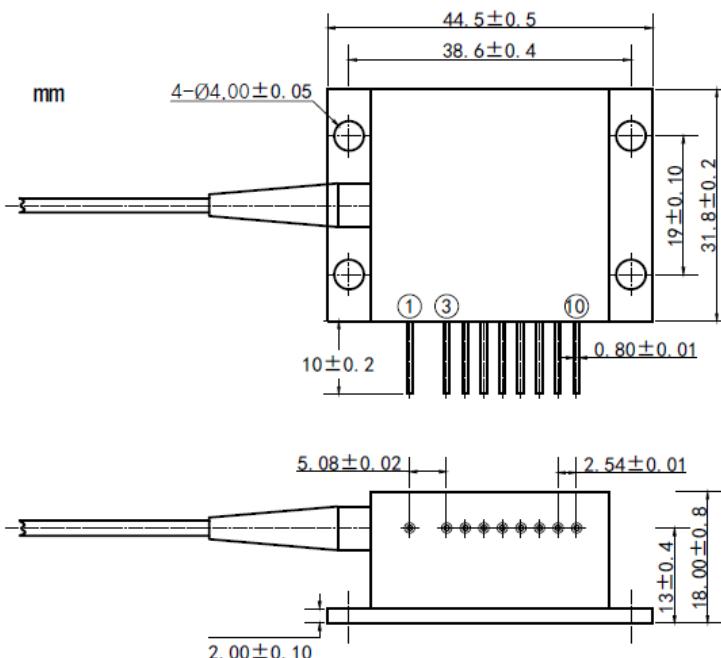

PIN	FUNCTION
1	TEC (-)
2	-
3	CASE
4	LD (+)
5	THERM
6	THERM
7	LD (-)
8	PD (P)
9	PD (N)
10	TEC (+)

Wavespectrum offer **Customized 525nm Fiber Coupled LD.**

- Customized Output Power
- Customized Fiber Core
- Dual-Wavelength or Tri-Wavelength Module Optional
(such as 2W@525nm+7W@808nm)

Contact us with info@wavespectrum-laser.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

