

488nm~490nm 20mW Single Mode Fiber Coupled Diode Laser With Photodiode (PD) | Built-in TEC cooler

488nm 20mW |HHL Package| SM Fiber| Blue Diode Laser | Built-in TEC Cooling | High Stability

WSLX-488-020m-4-H8-T-PD

Wavespectrum Laser Group


www.wavespectrum-laser.com

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	+10 ~ +30	°C
Storage Temperature	T_{stg}	-40 ~ +85	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C
Features: 488nm 3um SM Fiber - Built-in TEC Cooling - Built-in Photodiode Applications: - Medical Laser Treatment - Others			
			
Specifications	WSLX-488-020m-4-H8-T-PD		
	Min.	Type	Max.
Center Wavelength@25°C	488nm±10nm		
Spectral Width (FWHM)	----	2nm	----
Output Power	----	20mW	----
Recommend Operating Temperature	25 °C		
Threshold Current (Typ.)	----	35mA	70mA
Operating Current (Typ.)	----	150mA	170mA
Operating Voltage	----	6.5V	8.0V
TEC Max Current	1.3A		
TEC Max Voltage	4.0V		
Thermistor	10K		
Fiber Type	Single Mode Fiber		
Fiber Core	3um		
Fiber Length	>80cm		
Connector Type	FC/SC/SMA905		
Photodiode	Built-in		
Package Style	8-PIN		


Wavespectrum Laser Group
www.wavespectrum-laser.com
sales@wavespectrum-laser.com



8-Pin Package View:

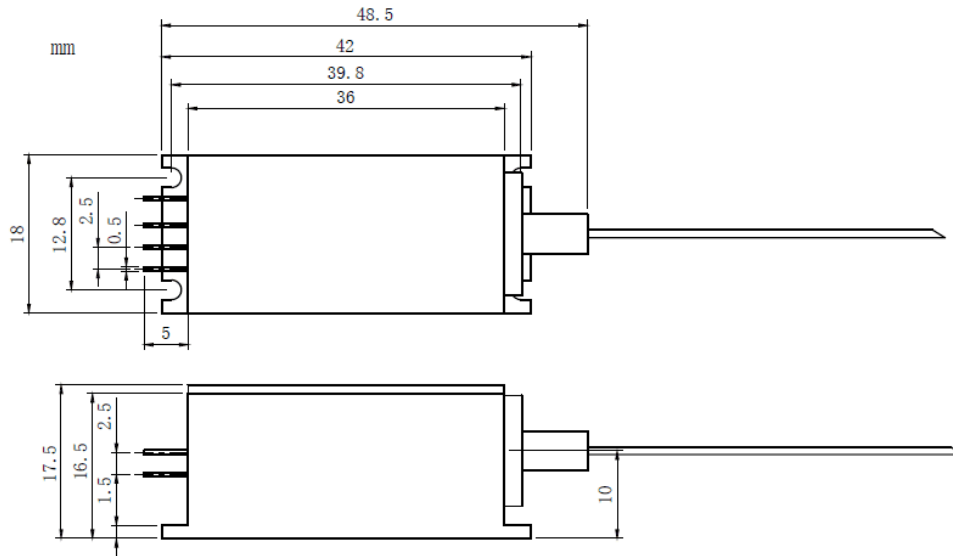

Pin Out:



PIN	FUNCTION	PIN	FUNCTION
1	RT	5	PD(+)
2	LD(-)	6	PD(-)
3	LD(+)	7	TEC(-)
4	RT	8	TEC(+)

Wavespectrum offer Customized 488nm Fiber Coupled LD.

- Customized Output Power
- Customized Fiber Core
- Dual-Wavelength or Tri-Wavelength Module Optional
(such as 50mW@488nm+10W@980nm)

Contact us with info@wavespectrum-laser.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.



Wavespectrum Laser Group
www.wavespectrum-laser.com
sales@wavespectrum-laser.com

