

780nm~785nm 8W H-mount Laser Diode | Window Package LD | FAC Optional | Square Beam Optional

785nm Laser Diode| High Power LD| 8W Power| Hermetic Package

WSLD-785-008-H


Wavespectrum Laser Group

www.wavespectrum-laser.com

785nm Laser Diode		8W/H-mount	Wavespectrum Laser Group	
PARAMETER	SYMBOL	VALUE		UNIT
Reverse Voltage	V _r	2.0		V
Operating Temperature	T _{op}	+10~+30		°C
Storage Temperature	T _{stg}	-20~ +80		°C
Lead soldering temperature (10 sec.)	T _{is}	260		°C
Features: ● 785nm ● Multimode ● H-mount Package（Window Package） ● FAC Lens Optional				
Applications: ● Medical Laser Treatment ● Sensing ● Others				
Specifications		WSLD-785-008-H		
		Min	Type	Max
Center Wavelength@25℃		785nm±10nm		
Spectral Width (FWHM)			2.0nm	
Output Power		----	8W	----
Emitter Area		----	200x1μm	-----
Beam Divergence (FWHM)		----	35° _⊥ x 8° _{//}	----
Temperature Coefficient of Wavelength		----	0.3nm / °C	----
Slope Efficiency		----	1.2W/A	----
Threshold Current (Typ.)		----	1.5A	----
Operating Current (Typ.)		----	9.0A	----
Operating Voltage		----	2.0V	----
Package Style		H-mount		
Recommended Operating Temperature		25℃		



H-mount Package View

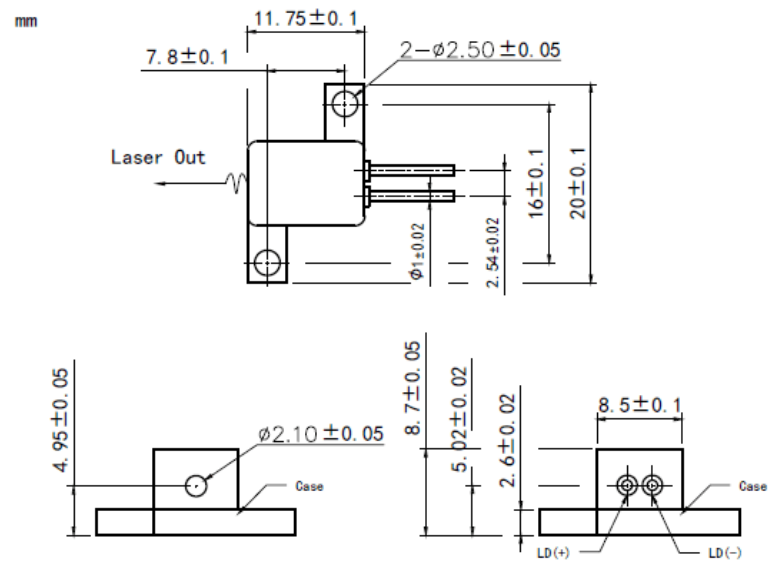

Electrically shorten LD module and store in non-extreme conditions.
Suggest using the constant current power supply.

