

635nm~638nm 50mW~60mw SM Fiber Coupled Laser Diode with SMF-28 Fiber

635nm Coaxial Pigtailed LD with 9um Fiber (SM Fiber)

WSLP-635-050m-9

Wavespectrum Laser Group

www.wavespectrum-laser.com

635nm Pigtailed Diode Laser

50mW/9um Fiber


en.wavespectrum-laser.com.cn

PARAMETER	SYMBOL	VALUE		UNIT		
Reverse Voltage	V_r	2.0		V		
Operating Temperature	T_{op}	-10~+60		°C		
Storage Temperature	T_{stg}	-40~+85		°C		
Lead soldering temperature (10 sec.)	T_{ls}	260		°C		
Features:	<ul style="list-style-type: none"> ● 635nm ● 9um Fiber ● Coaxial or B82 Package 					
Applications:	<ul style="list-style-type: none"> ● Medical Laser Treatment ● Aiming Beam ● Others 					
Specifications	WSLP-635-050m-9					
	Min	Type	Max			
Center Wavelength@25°C	630nm	638nm	645nm			
Recommended work Temperature	25°C					
Output Power	----	50mW	----			
Fiber Type	SMF-28					
Fiber Core	9um					
Monitor Current	----	----	----			
PD Reverse Voltage	----	----	----			
Fiber Connector	FC/SC/SMA905					
Fiber Length	----	80cm	100cm			
Threshold Current (Typ.)	----	60mA	100mA			
Operating Current (Typ.)	----	190mA	210mA			
Operating Voltage	----	2.7V	3.3V			
Package Style	Coaxial or B82					








Coaxial Package View: (Part Number: WSLP-635-050m-9)

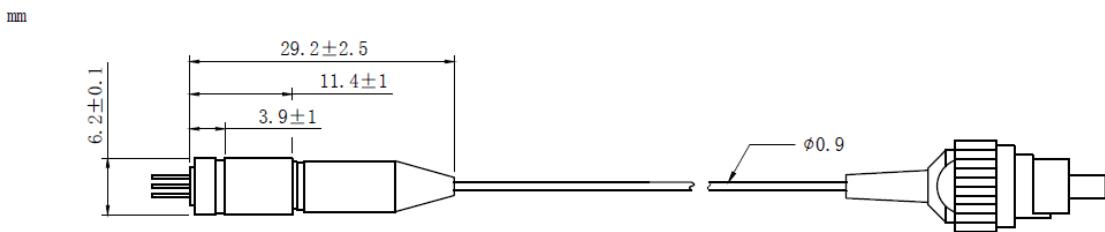

B82 Package View: (Part Number: WSLP-635-050m-9-B)

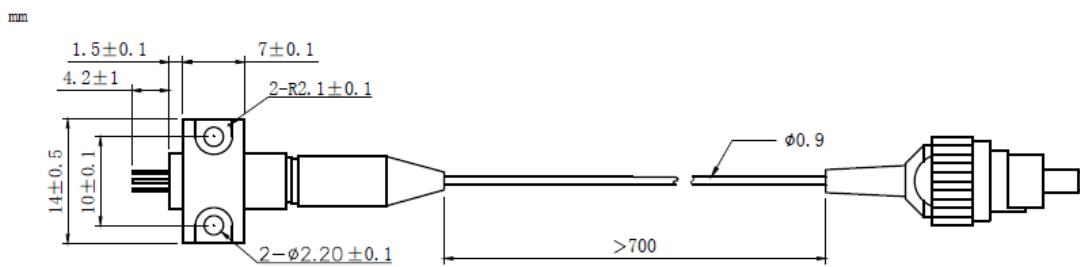

PIN Bottom View:

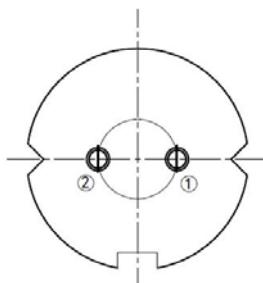

1	LD(+)
2	LD(-)



Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

