


630nm 300mW Fiber Coupled Laser Diode with 9-Pin Package | Built-in TEC cooler
630nm~633nm 300mW 9-Pin HHL Pigtailed Diode Laser Module With 50um MM Fiber | Built-in PD
WSLX-630-300m-50M-H9-T-PD
Wavespectrum Laser Group
www.wavespectrum-laser.com
en.wavespectrum-laser.com.cn

630nm Pigtailed Diode Laser		300mW/MM Fiber	
PARAMETER	SYMBOL	VALUE	UNIT
MAX Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	0~+20	°C
Storage Temperature	T_{stg}	-40~+85	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C
Features: <ul style="list-style-type: none"> 🔸 630nm 🔸 9-Pin Package 🔸 Built-in TEC Cooler 🔸 Built-in Photodiode 			
Applications: <ul style="list-style-type: none"> 🔸 Medical Laser Treatment 🔸 Sensor 🔸 Others 			
Specifications	WSLX-630-300m-50M-H9-T-PD		
	Min	Type	Max
Center Wavelength@15°C	630nm±10nm		
Output Power		300mW	
Spectral Width (FWHM)		2nm	
Recommended Operating Temperature	≤15°C		
Temperature Coefficient of Wavelength	0.2nm / °C		
Threshold Current (Typ.)		0.3A	
Operating Current (Typ.)		0.7A	
Operating Voltage		2.5V	
TEC Max Current	6A		
TEC Max Voltage	9.8V		
Thermistor	10K		
Fiber Core	50um		
N.A.	0.22		
Fiber Connector	FC/SMA905		
Fiber Length	>80cm		
Package Style	9-Pin		



9-PIN HHL Package View

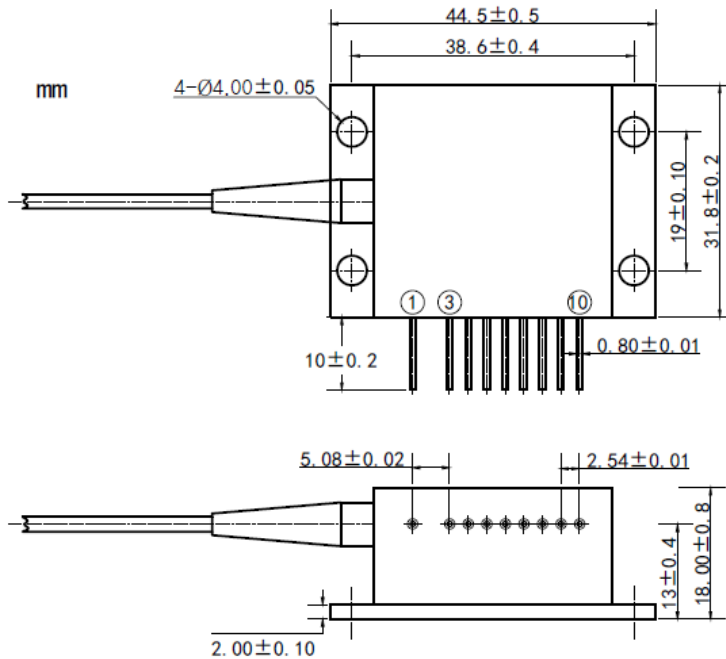

PIN	FUNCTION
1	TEC (-)
2	-
3	CASE
4	LD (+)
5	THERM
6	THERM
7	LD (-)
8	PD (P)
9	PD (N)
10	TEC (+)

Wavespectrum offer **Customized** 630nm Fiber Coupled LD.

- Customized Output Power
- Customized Fiber Core
- **Dual-Wavelength** or **Tri-Wavelength** Module Optional
(such as 2W@630nm+ 12W@808nm)

Contact us with info@wavespectrum-laser.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.



Wavespectrum Laser Group
www.wavespectrum-laser.com
sales@wavespectrum-laser.com

