

**1570nm 1.5W Fiber Coupled Diode Laser Module | Built-in PD Optional | Infrared Laser Module**
**1570nm 1500mW | 2-PIN Package | 105um 200um 400um Fiber Core | High Power LD**
**WSLX-1570-1500m-M-H2**
**Wavespectrum Laser Group**
**en.wavespectrum-laser.com.cn**

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	$V_r$	2.0	V
Operating Temperature	$T_{op}$	+10 ~ +30	°C
Storage Temperature	$T_{stg}$	-20 ~ +80	°C
Lead soldering temperature (10 sec.)	$T_{is}$	260	°C

**Features:**

- 1570nm
- CW Mode
- Built-in PD Optional
- Built-in TEC Cooling Optional

**Applications:**


- Medical Laser Treatment
- Others


**Specifications**
**WSLX-1570-1500m-M-H2**

	Mini	Type	Max
Center Wavelength@25°C	1570nm±40nm		
Spectral Width (FWHM)	----	15.0nm	----
Output Power	----	1.5W	----
Temperature Coefficient of Wavelength	----	0.7nm / °C	----
Threshold Current (Typ.)	----	0.5A	----
Operating Current (Typ.)	----	8.0A	----
Operating Voltage	----	1.8V	----
Recommended Case Temperature	25°C		
Fiber Core Diameter	105um (200um 400um Optional)		
Fiber Numerical Aperture	0.22 (0.37N.A. Optional)		
Fiber Length	>80cm		
Connector Type	SMA905/ST/FC		
Package Style	2-Pin-01		



## 2-Pin-01 Package View

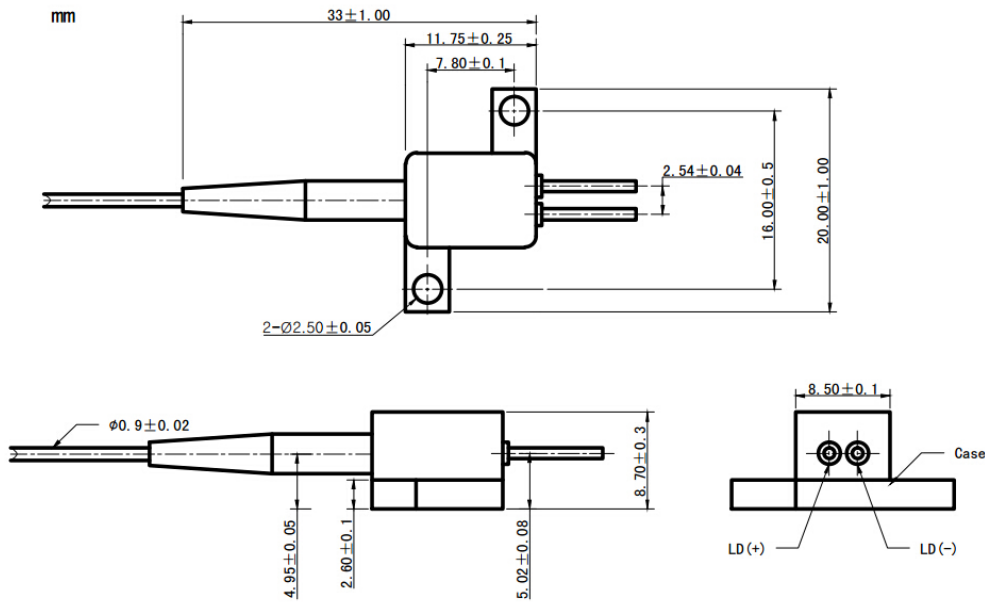

Wavespectrum offer **Customized 1570nm Fiber Coupled LD.**

- Customized Output Power
- Customized Fiber Core
- Dual-Wavelength or Tri-Wavelength Module Optional (such as 2W@1570nm+350mw@635nm)

Contact us with [info@wavespectrum-laser.com](mailto:info@wavespectrum-laser.com)

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.



Wavespectrum Laser Group  
[www.wavespectrum-laser.com](http://www.wavespectrum-laser.com)  
[sales@wavespectrum-laser.com](mailto:sales@wavespectrum-laser.com)

