

910nm~915nm 10W Fiber Coupled Laser Diode Module | Built-in TEC Cooler |9-Pin HHL Package
915nm 10W|9-PIN Package| 105um, 200um, 400um Fiber Core Optional | High Power LD | Built-in PD
WSLX-915-010-M-H9-T-PD **Wavespectrum Laser Group** **www.wavespectrum-laser.com**

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	+10 ~ +30	°C
Storage Temperature	T_{stg}	-20 ~ +80	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

Features:

- 915nm
- Multimode Fiber
- 9-Pin Package
- Built-in TEC Cooler
- Built-in Photodiode

Applications:

- Medical Laser Treatment
- Others




Specifications

WSLX-915-010-M-H9-T-PD

	Min.	Type	Max.
Center Wavelength@25°C	915nm±10nm		
Spectral Width (FWHM)	-----	4nm	-----
Output Power	-----	10W	-----
Temperature Coefficient of Wavelength	-----	0.3nm / °C	-----
Threshold Current (Typ.)	-----	0.5A	1.0A
Operating Current (Typ.)	-----	12.0A	13.0A
Operating Voltage	-----	1.8V	2.3V
Recommended Case Temperature	25°C		
TEC Max. Current	6A		
TEC Max. Voltage	9.8V		
Thermistor	10K		
Fiber Core Diameter	105um (200um, 400um Optional)		
Fiber Length	>80cm		
Connector Type	SMA905/ST/FC		
Package Style	9-Pin		
Photodiode	Built-in		

sales@wavespectrum-laser.com

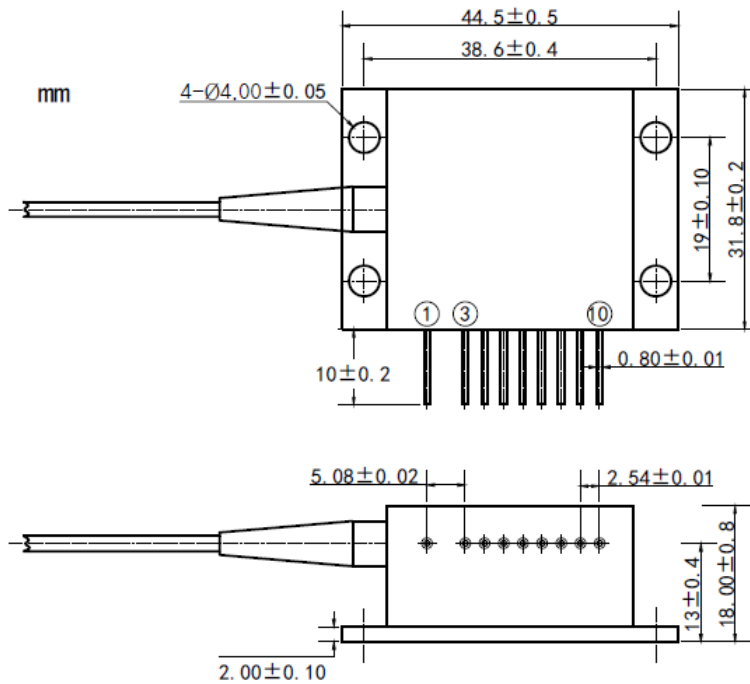

9-Pin Package View:


PIN	FUNCTION
1	TEC (-)
2	-
3	CASE
4	LD (+)
5	THERM
6	THERM
7	LD (-)
8	PD (P)
9	PD (N)
10	TEC (+)

Wavespectrum offer Customized 915nm Fiber Coupled LD.

- Customized Output Power
- Customized Fiber Core
- Dual-Wavelength or Tri-Wavelength Module Optional (such as 2W@850nm+10W@915nm)

Contact us with info@wavespectrum-laser.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

