

520nm~525nm 2W Fiber Coupled Laser Diode (LD) Module with HHL Package | 525nm Green Laser Module
525nm | 2W Output Power| HHL Package With 105um Multi-mode Fiber| Built-in TEC Cooler Optional
WSLX-525-002-M-H **Wavespectrum Laser Group** **www.wavespectrum-laser.com**

PARAMETER	SYMBOL	VALUE	UNIT
MAX Reverse Current	I_r	80	mA
Operating Temperature	T_{op}	0~ +60	°C
Storage Temperature	T_{stg}	-40~ +85	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

Features:

- 525nm
- 2W Output Power
- Built-in TEC Cooler Optional
- Built-in Photodiode Optional
- Stainless Steel Armor Optional

Applications:

- Medical Laser Treatment
- Laser Show
- Others




Specifications

WSLX-525-002-M-H

	Min.	Type	Max.
Center Wavelength@25°C	510nm	525nm	535nm
Spectral Width (FWHM)	----	6nm	----
Output Power	----	2W	----
Temperature Coefficient of Wavelength	----	0.05nm / °C	----
Threshold Current (Typ.)	----	0.3A	0.5A
Operating Current (Typ.)	----	1.8A	2.0A
Operating Voltage	----	20V	24V
Fiber Core Diameter	105um		
Fiber Numerical Aperture	0.22		
Fiber Length	>80cm		
Connector Type	SMA905/ST/FC		
Package	P4 Package		



P4 Package View

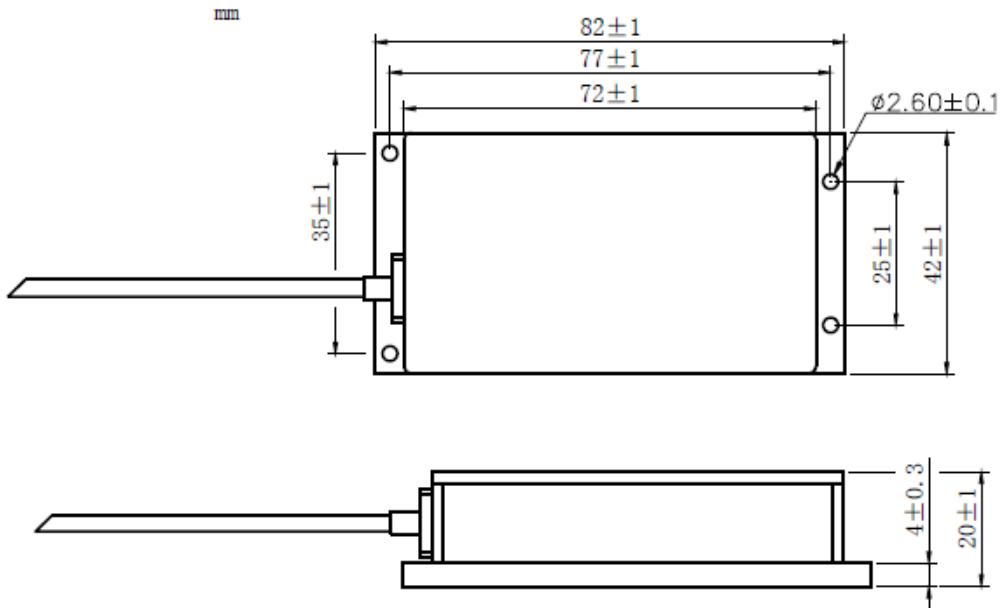

Wavespectrum offer **Customized** 525nm Fiber Coupled LD.

Please let me know your special request:

- Customized Output Power
- Customized Fiber
- Customized Fiber Connector

Contact us with info@wavespectrum-laser.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

