

670nm 1W Fiber Coupled Laser Diode Module with 105um Multi-mode Fiber| Infrared LD Module
665nm~670nm 1W Pigtailed Diode Laser Module |2-Pin Package| 105um Fiber Core
WSLX-670-001-M-H2
Wavespectrum Laser Group
en.wavespectrum-laser.com.cn

PARAMETER	SYMBOL	VALUE	UNIT
MAX Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	+10 ~ +30	°C
Storage Temperature	T_{stg}	-20 ~ +80	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

Features:

- 670nm
- 105um Fiber Core
- 2-Pin Package
- Long lifetime

Applications:


- Medical Laser Treatment
- Pumping
- Others


Specifications
WSLX-670-001-M-H2

	Min	Type	Max
Center Wavelength@25°C	670nm±10nm		
Spectral Width (FWHM)	----	3nm	----
Output Power	----	1W	----
Temperature Coefficient of Wavelength	----	0.2nm / °C	----
Threshold Current (Typ.)	----	0.5A	1.0A
Operating Current (Typ.)	----	1.6A	1.8A
Operating Voltage	----	2.2V	2.5V
Slope Efficiency		1.0W/A	
Fiber Core Diameter	105um		
Fiber Numerical Aperture	0.22		
Fiber Length	>80cm		
Connector Type	FC (SMA905 Optional)		
Package Style	2-Pin-02		
Recommend Operating Temperature	25°C		



2-Pin-02 Package View

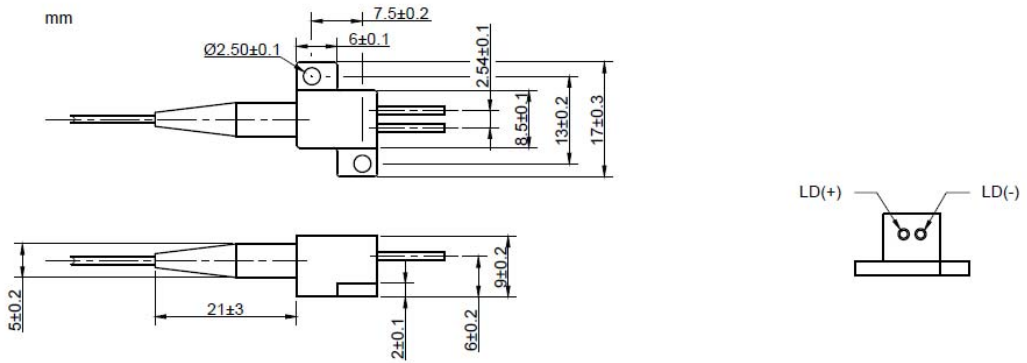

Wavespectrum offer **Customized 670nm Fiber Coupled LD.**

- Customized Output Power
- Customized Fiber Core
- **Dual-Wavelength or Tri-Wavelength Module Optional**(such as **12w@808nm+2w@670nm**)

Contact us with info@wavespectrum-laser.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

