

515nm~520nm 20mW PM Fiber Coupled Diode Laser With TEC Cooler |Green Laser Diode Module with PD
 520nm 20mW Pigtailed Laser Module with Polarization Maintaining Fiber |HHL Package| Built-in Photodiode
 WSLX-520-020m-PM-H8-T-PD Wavespectrum Laser Group en.wavespectrum-laser.com.cn

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	+10 ~ +30	°C
Storage Temperature	T_{stg}	-20 ~ +80	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

Features:

- 520nm
- 3um PM Fiber
- Built-in TEC Cooling
- Built-in Photodiode
- 8-Pin Package

Applications:

- Medical Laser Treatment
- Biotechnology
- Others



Specifications

WSLX-520-020m-PM-H8-T-PD


	Min.	Type	Max.
Center Wavelength@25°C	520nm±10nm		
Spectral Width (FWHM)	----	2nm	----
Output Power	----	20mW	----
Recommend Operating Temperature	25 °C		
Threshold Current (Typ.)	----	45mA	85mA
Operating Current (Typ.)	----	220mA	240mA
Operating Voltage		7.5V	8.0V
Polarization Extinction Ratio	13dB	15dB	
TEC Max Current	1.3A		
TEC Max Voltage	4.0V		
Thermistor	10K		
Fiber Type	Polarization Maintaining Fiber		
Fiber Core	3um		
Fiber Length	>80cm		
Connector Type	FC/APC		

High Polarization Extinction Ratio (PER) Version Laser Module is also available, please contact us.


Wavespectrum Laser Group
 www.wavespectrum-laser.com
 sales@wavespectrum-laser.com



8-Pin Package View:

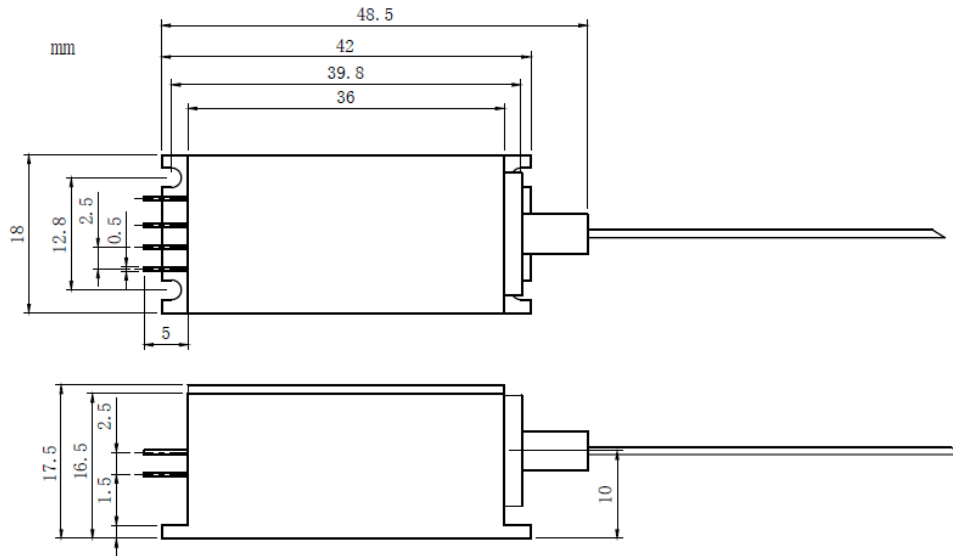

Pin Out:



PIN	FUNCTION	PIN	FUNCTION
1	RT	5	PD (+)
2	LD (-)	6	NC
3	LD (+) & PD (-)	7	TEC (-)
4	RT	8	TEC (+)

Wavespectrum offer Customized 520nm Fiber Coupled LD.

- Customized Output Power
- Customized Fiber Core
- Dual-Wavelength or Tri-Wavelength Module Optional
(such as 2W@520nm+10W@980nm)

Contact us with info@wavespectrum-laser.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

